


## S1 input module for datalogger MS

code: M1042

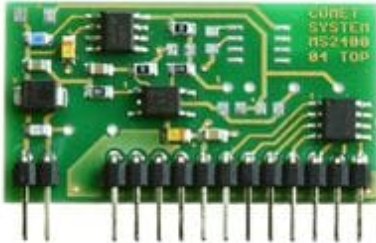

Binary voltage input. Voltage for "switched ON" state: 3 to 30Vdc, input current in the "switched ON" state: 1 to 9mA depending on the applied voltage. Minimum duration for indication of change: 200ms, galvanically isolated. Galvanic isolation is not designed as safety protection.

### Technical data